MS868

RL IP 54 3PL

Main material and f nish : Black powder coated ALU handle and lock panel,ZDC housing,white zinc plated steel cam
Application : Quarter-turn opening or closing, padlock available

Default cam : 2882450603

Performance parameter:
Maximum static load: 270N
Maximum input torque: 20N.m

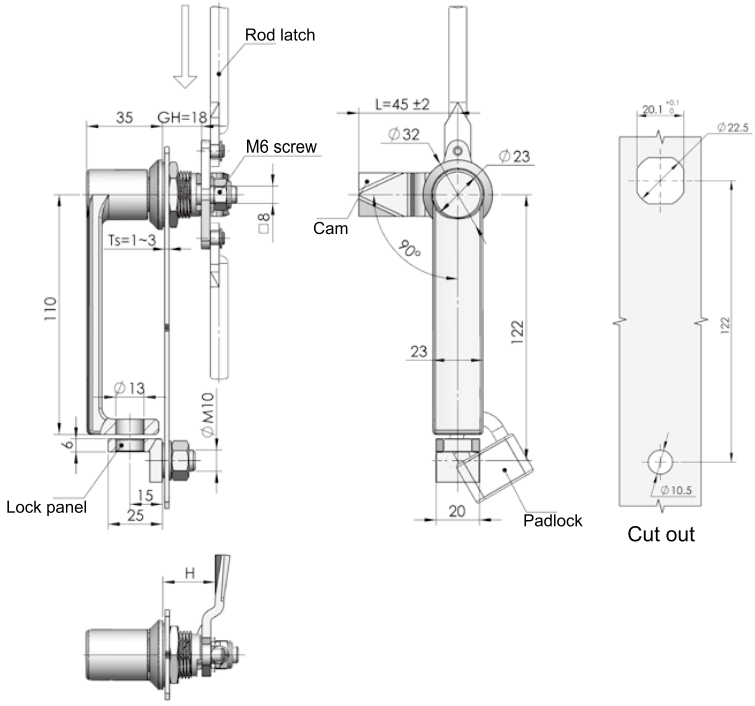

ERP	MS868Z1A000001

Remark : Default cam DS3B4506 (square 8*8 cam optional)

MS887-1

Main material and f nish : Black powder coated ZDC housing, handle, white zinc-plated steel cam
Application : Handle combines with latch

Performance parameter:
Handle load tension capability: 100N

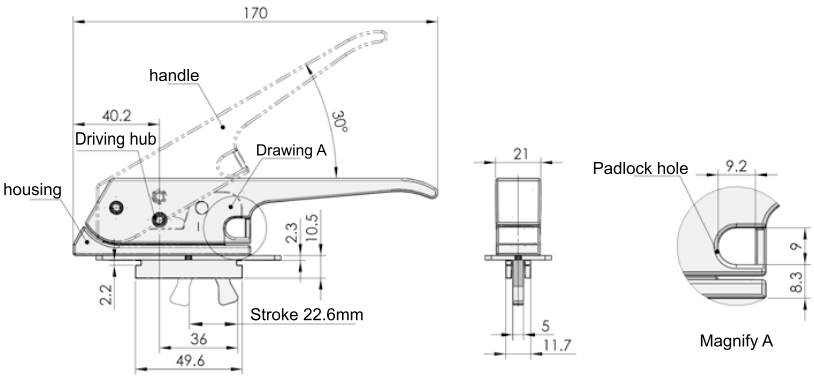



Cut out

Remark : Lock driving part prepared by user

ERP	MS887Z1A000001